

P-Channel 30V (D-S) MOSFET

Product Summary		
V _{DS} (V)	R _{DS(on)} (mΩ) (Max.)	I _D (A)
-30	3.9 at V _{GS} = -10 V	-60
	6.2 at V _{GS} = -4.5 V	-60

Features



- Very Low R_{DS(on)} at 4.5V V_{gs}
- Low Gate Charge
- High Current Capability
- 100% R_g and UIS Tested
- RoHS and Halogen-Free Compliant

Applications

- Notebook
 - Load Switch

Pin Configuration

Power5x6

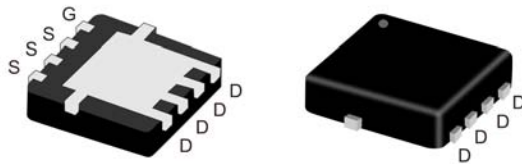

P-Channel MOSFET

Absolute Maximum Ratings

Parameter	Symbol	Maximum	Units
Drain-Source Voltage	V _{DS}	-30	V
Gate-Source Voltage	V _{GS}	± 20	V
Continuous Drain Current ^G	I _D	T _C =25°C	-60
		T _C =70°C	-60
Pulsed Drain Current ^C	I _{DM}	-100	A
Continuous Drain Current	I _{DSM}	T _A =25°C	-31.6
		T _A =70°C	-25.3
Avalanche Current ^C	I _{AS} , I _{AR}	-40	A
Avalanche energy L=0.1mH ^C	E _{AS} , E _{AR}	80	mJ
Power Dissipation ^B	P _D	T _C =25°C	104
		T _C =70°C	66.6
Power Dissipation ^A	P _{DSM}	T _A =25°C	6.25
		T _A =70°C	4.0
Junction and Storage Temperature Range	T _J , T _{STG}	-55 to 150	°C

Thermal Data

Parameter	Symbol	Typ	Max	Units
Maximum Junction-to-Ambient ^A	R _{θJA}	15	20	°C/W
Maximum Junction-to-Case	R _{θJC}	0.9	1.2	°C/W

Electrical Characteristics (T_J = 25 °C Unless Otherwise Specified)

Symbol	Parameter	Conditions	Min	Typ	Max	Units	
STATIC PARAMETERS							
B _V DSS	Drain-Source Breakdown Voltage	I _D =-250 μA, V _{GS} =0V	-30			V	
I _D DSS	Zero Gate Voltage Drain Current	V _{DS} =-30V, V _{GS} =0V T _J =55°C			-1 -10	μA	
I _{GSS}	Gate-Body leakage current	V _{DS} =0V, V _{GS} = ±20V			± 100	nA	
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250μA	-1.0		-3.0	V	
I _{D(ON)}	On state drain current	V _{GS} =-10V, V _{DS} =-5V	-30			A	
R _{DS(ON)}	Static Drain-Source On-Resistance	V _{GS} =-10V, I _D =-20A		3.2	3.9	mΩ	
		V _{GS} =-4.5V, I _D =-15A		5.0	6.2	mΩ	
g _{FS}	Forward Transconductance	V _{DS} =-15V, I _D =-20A		95		S	
V _{SD}	Diode Forward Voltage	I _S =-5A, V _{GS} =0V		-0.74	-1.1	V	
I _S	Maximum Body-Diode Continuous Current ^G				-60	A	
DYNAMIC PARAMETERS							
C _{iss}	Input Capacitance	V _{GS} =0V, V _{DS} =-15V, f=1MHz		8650		pF	
C _{oss}	Output Capacitance				1215		pF
C _{rss}	Reverse Transfer Capacitance				1125		pF
R _g	Gate resistance	V _{GS} =0V, V _{DS} =0V, f=1MHz		1.7		Ω	
SWITCHING PARAMETERS							
Q _g (10V)	Total Gate Charge	V _{GS} =-10V, V _{DS} =-15V, I _D =-20A		167	250	nC	
Q _g (4.5V)	Total Gate Charge	V _{GS} =-4.5V, V _{DS} =-15V, I _D =-20A		78	120	nC	
Q _{gs}	Gate Source Charge			27		nC	
Q _{gd}	Gate Drain Charge			35		nC	
t _{D(on)}	Turn-On DelayTime			110	170	ns	
t _r	Turn-On Rise Time	V _{DD} =-15V, R _L =15 Ω		100	150	ns	
t _{D(off)}	Turn-Off DelayTime	I _D ≅ -1.0A, V _{GEN} =-4.5V, R _g =1Ω		100	150	ns	
t _f	Turn-Off Fall Time			50	75	ns	
t _{rr}	Body Diode Reverse Recovery Time	I _F =-3.5A, di/dt=100A/μs		50	100	ns	
Q _{rr}	Body Diode Reverse Recovery Charge	I _F =-3.5A, di/dt=100A/μs		65	130	nC	

A. The value of R_{θJA} is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with T_A =25° C. The Power dissipation P_{DSM} is based on R_{θJA} and the maximum allowed junction temperature of 150° C. The value in any given application depends on the user's specific board design, and the maximum temperature of 150° C may be used if the PCB allows it.

B. The power dissipation P_D is based on T_{J(MAX)}=150° C, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.

C. Repetitive rating, pulse width limited by junction temperature T_{J(MAX)}=150° C. Ratings are based on low frequency and duty cycles to keep initial T_J=25° C.

D. The R_{θJA} is the sum of the thermal impedance from junction to case R_{θJC} and case to ambient.


E. The static characteristics in Figures 1 to 6 are obtained using <300μs pulses, duty cycle 0.5% max.

F. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of T_{J(MAX)}=150° C. The SOA curve provides a single pulse rating.


G. The maximum current rating is package limited.

H. These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with T_A=25° C.


TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

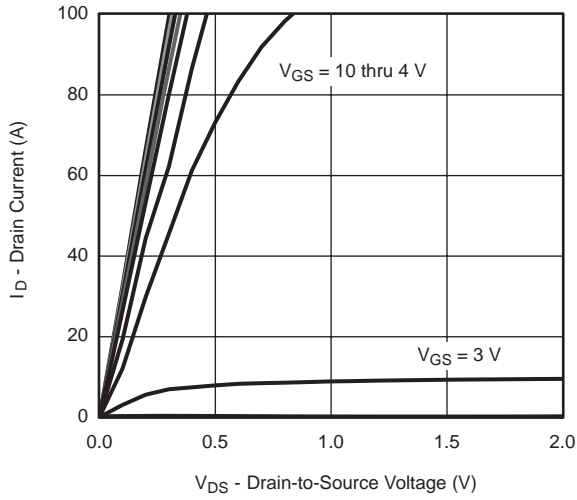


Output Characteristics

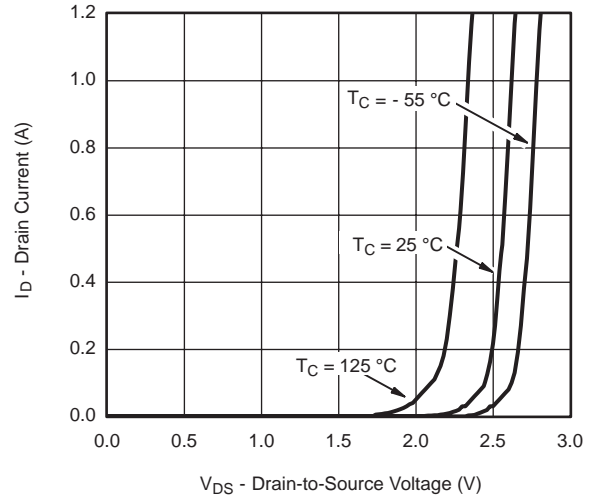


Transfer Characteristics

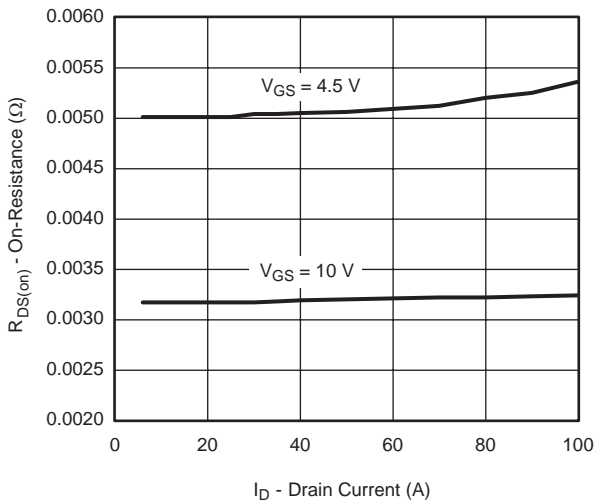


On-Resistance vs. Drain Current and Gate Voltage

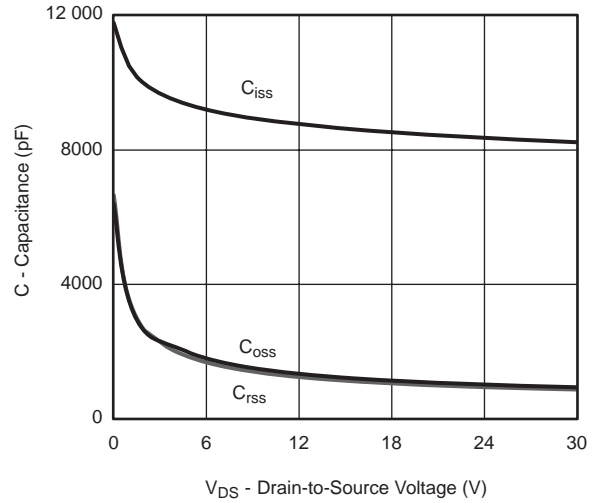

Capacitance

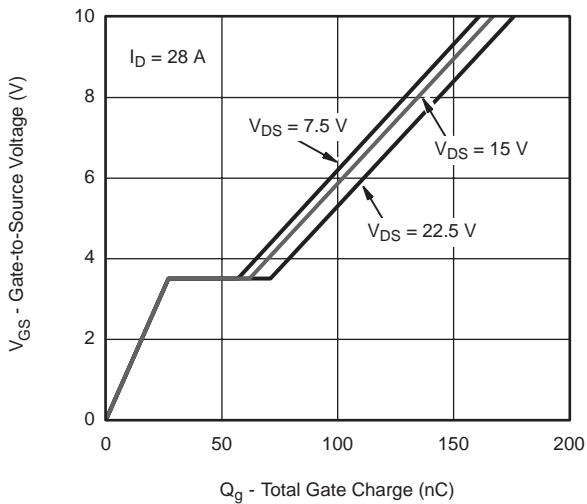


Gate Charge

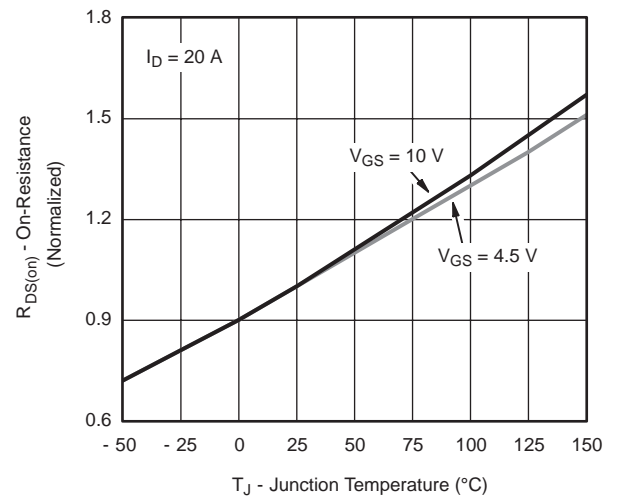


On-Resistance vs. Junction Temperature


TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

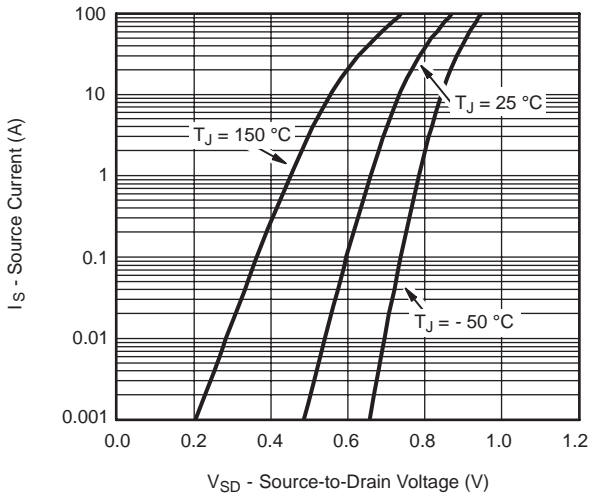


Source-Drain Diode Forward Voltage

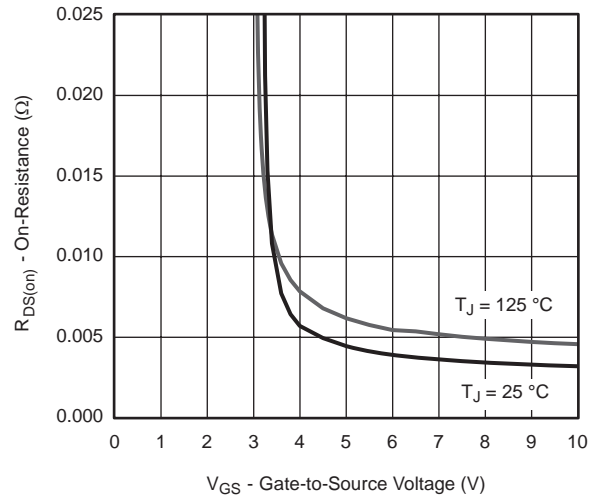


On-Resistance vs. Gate-to-Source Voltage

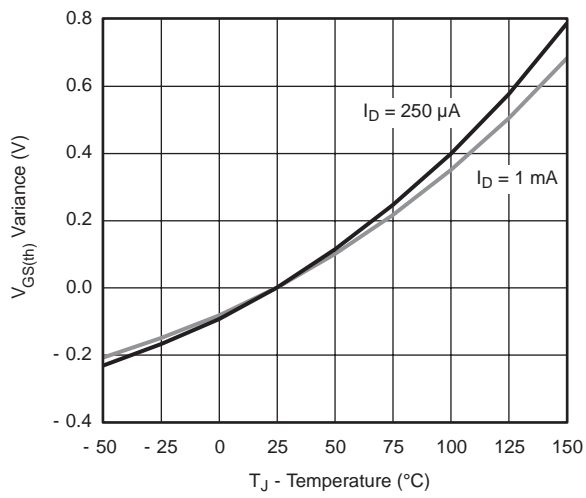

Threshold Voltage

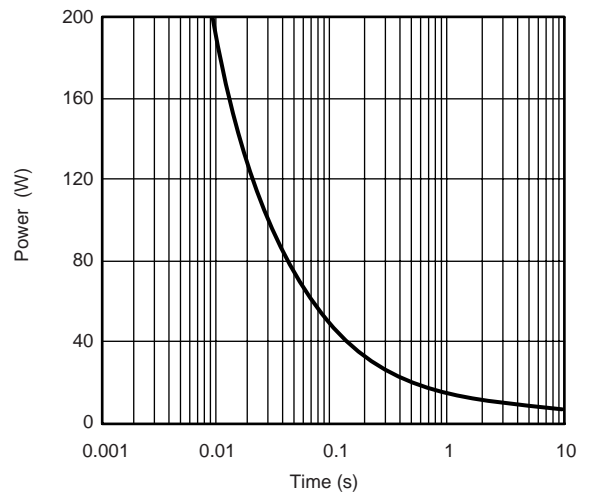


Single Pulse Power, Junction-to-Ambient

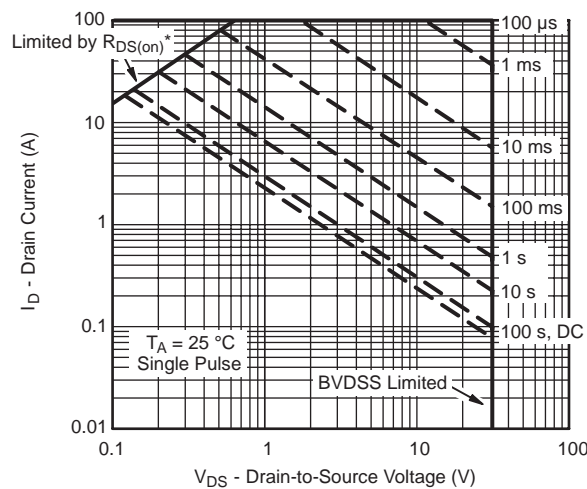


* $V_{GS} >$ minimum V_{GS} at which $R_{DS(on)}$ is specified

Safe Operating Area, Junction-to-Ambient


TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

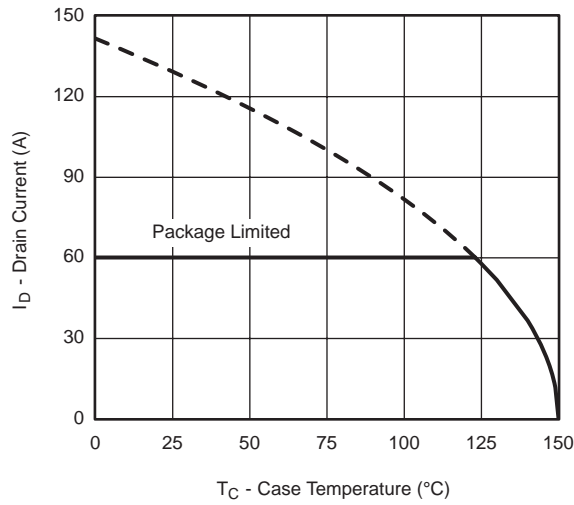

Current Derating*

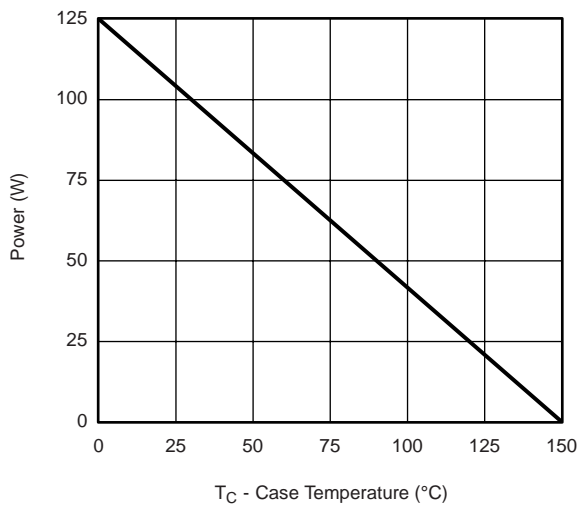


Power, Junction-to-Case

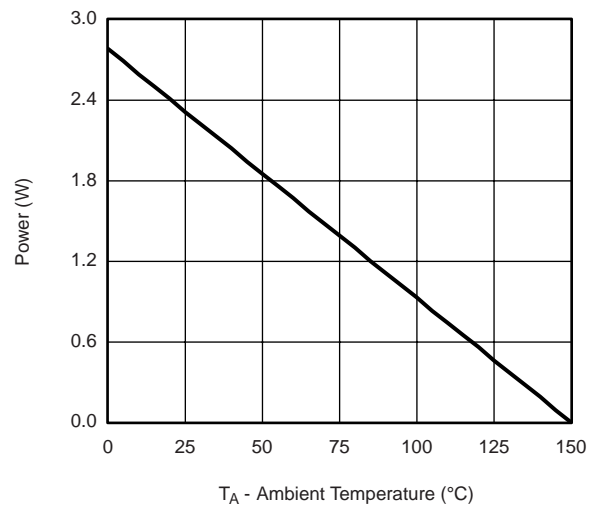


Power, Junction-to-Ambient

* The power dissipation P_D is based on $T_{J(max)} = 150$ °C, using junction-to-case thermal resistance, and is more useful in settling the upper dissipation limit for cases where additional heatsinking is used. It is used to determine the current rating, when this rating falls below the package limit.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS


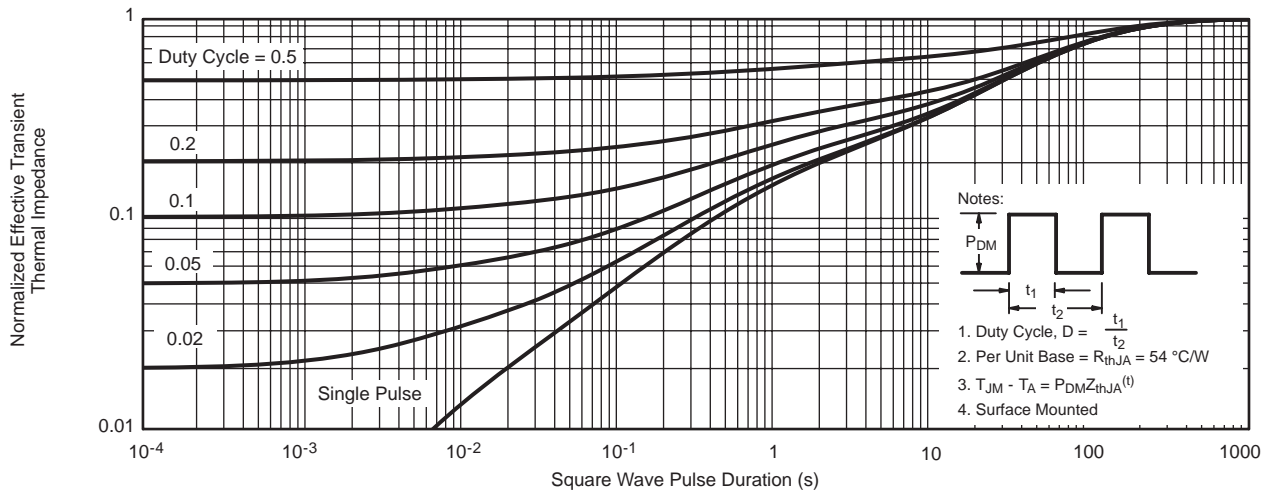


Normalized Thermal Transient Impedance, Junction-to-Ambient

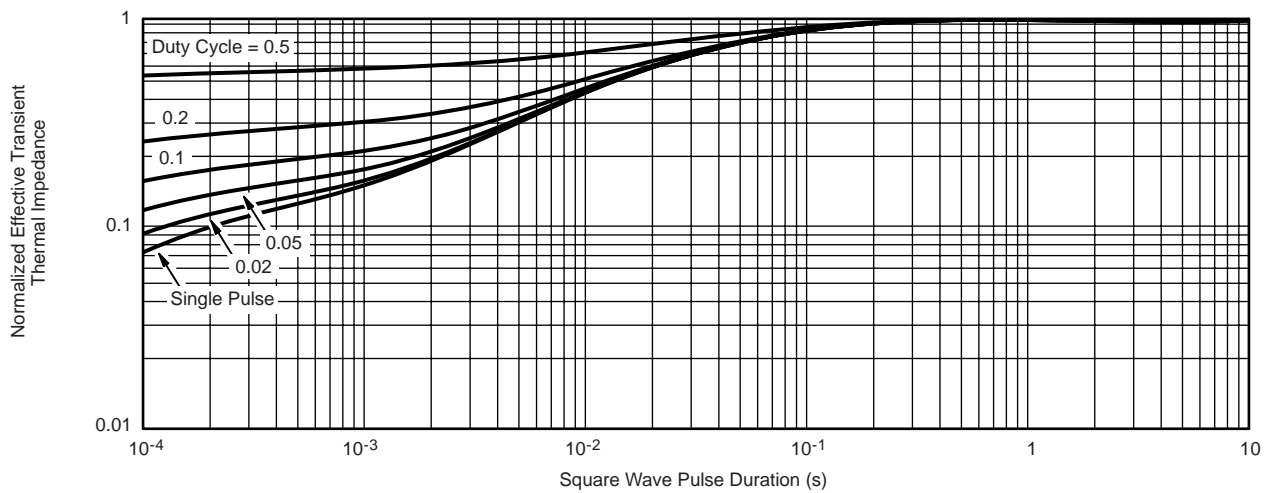

Normalized Thermal Transient Impedance, Junction-to-Case

Power5x6 Package Information

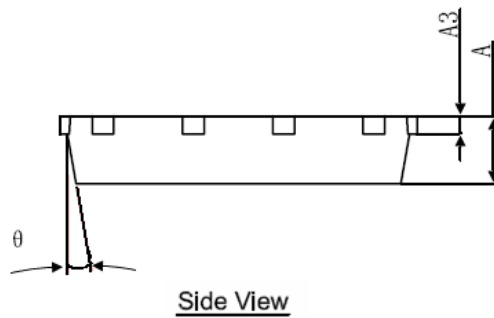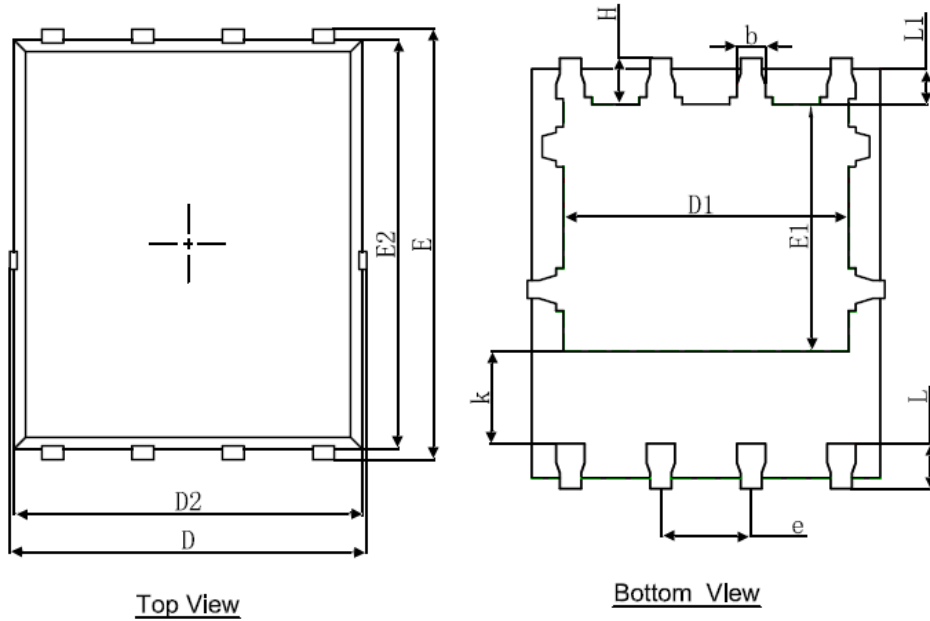

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.000	0.035	0.039
A3	0.254REF.		0.010REF.	
D	4.944	5.096	0.195	0.201
E	5.974	6.126	0.235	0.241
D1	3.910	4.110	0.154	0.162
E1	3.375	3.575	0.133	0.141
D2	4.824	4.976	0.190	0.196
E2	5.674	5.826	0.223	0.229
k	1.190	1.390	0.047	0.055
b	0.350	0.450	0.014	0.018
e	1.270TYP.		0.050TYP.	
L	0.559	0.711	0.022	0.028
L1	0.424	0.576	0.017	0.023
H	0.574	0.726	0.023	0.029
θ	8°	12°	8°	12°